

1

getting started

This Quick Start Guide has been design to aid in quickly getting started with using your new projector. If you require further help, or have further questions on the detail in how to operate this unit, please refer to our web site in order to download full product documentation. You can also access FAQs, and download detailed white papers in order to get to know the more specific product features and benefits.

Packaging contents:



projector unit



remote control



power cable



user documentation

2

mount projection lens, get to know the connector panel

Carefully mount the projection lens. Remove protection end caps on lens and bayonet mount, then insert, and turn clockwise until it stops and a click sounds. The connector panel at the back features a wide range of connectors for all sorts of source connections. Decide which one(s) that meet(s) your requirement(s).



3

connect sources, connect power, power on

Make sure the projector is switched off, and not connected to power when connecting to sources. Connect video and computer sources, then insert the power cable. Power up sources, including computers and video playback devices. Power up the projector by pressing the power key (⏻). A steady, bright indicator light will indicate it is in operation. CAUTION! Connecting sources to a powered projector may result in product failure. It is recommended that the power cable connector (projector-end) or the mains power socket are accessible whilst the product is in use to enable mains power to be disconnected or switched off when connecting source devices. This should be considered during product installation.




*

4

adjust projector settings


Adjust zoom to set correct image size, shift to position correctly, focus for clarity, and any other desired setting, such as tilt or keystone. Note that keystone is very rarely needed when using lens shift for positioning. Adjust image level with the front feet, and tilt with the rear foot.

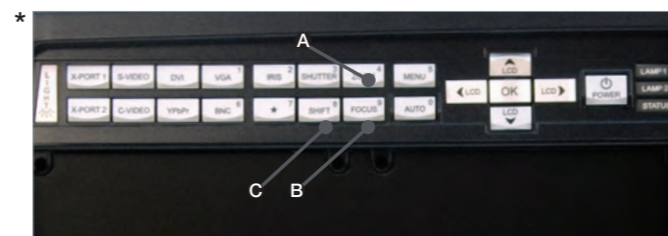

A: Zoom B: Focus C: Shift Press to activate. Adjust with arrow keys.



D: Lens shift (operated from back)

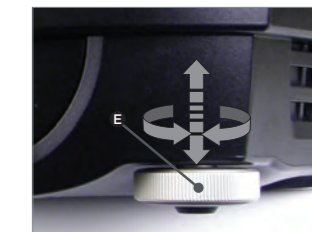


E: Adjustable feet for levelling.

5

adjust image and system settings

Change and adjust settings such as brightness and contrast, ceiling mount and rear projection display, as well as colour calibration, and other system settings by using the remote control or through the menu system that is accessible from the on-board keypad.

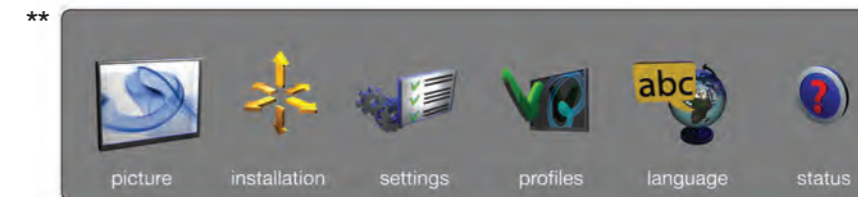

**

6

power off and allow to cool down

To power off, press the power (⏻) key once, and confirm by pressing again. Allow to cool down for a minimum of 30 seconds, and steady amber indicator lights indicate the projector has been safely turned off. Disconnect any cables, sources and power cables before uninstalling the projector.

The cabinet colour may differ from the one shown in the pictures

* Pictures show backpanel of projector with UHP lamps.
LED illumination projectors have one indicator lamp (LED), instead of two (LAMP 1, LAMP 2).
** Main menu may vary depending on product configuration.

>30 s



*

When referring to the term F32 in this document, it means that the content is applicable for the following Barco products:

- F32 SXGA+ FL33 1080p
- F32 1080p FL33 WUXGA
- F32 WUXGA FS33 IR 1080p + Addendum
- FS33 IR WUXGA + Addendum

Please visit our web site to download full user manual or find related information

